
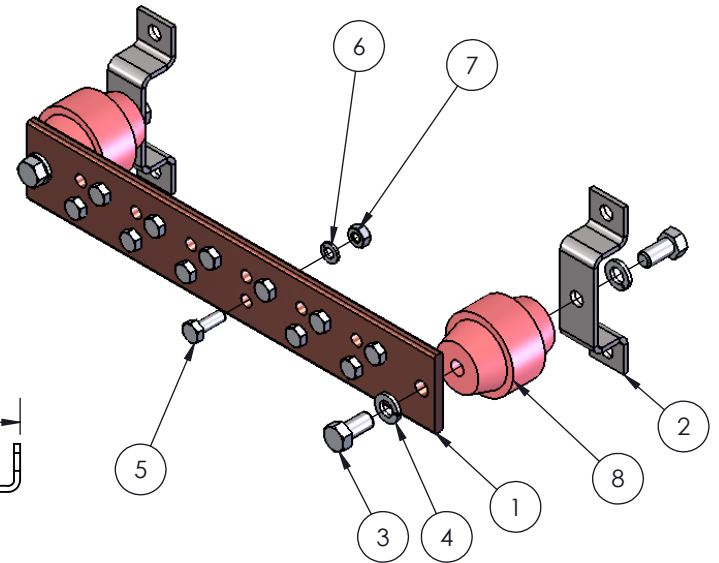



NOTES:

- 1 - TIN COPPER BAR AS PER MIL-C-10727C TY:1
- 2 - WEIGHT: 3.13 LB
- 3- INSULATORS RATED FOR 2700V, ARE UL RECOGNIZED TO UL STANDARD FOR SAFETY 891, AND MEET UL FLAMABILITY RATING 94 V-O.
- 4 - GROUND BUS CAN ACCOMMODATE A QUANTITY OF (6) LUGS WITH 2 HOLES AT EITHER 1" CENTERS OR 5/8" CENTERS.

NO.	NOTE	DESCRIPTION	QTY
1	1305031409	COPPER BAR 2"	1
2	1305031411	BRACKET	2
3	3/8-16 x 3/4	STAINLESS STEEL HEX BOLT	4
4	3/8"	STAINLESS STEEL LOCK WASHER	4
5	1/4-20 x 3/4	STAINLESS STEEL HEX BOLT	12
6	1/4"	STAINLESS STEEL LOCK WASHER	12
7	1/4-20	STAINLESS STEEL HEX NUT	12
8	GLASTIC 2015-3D	INSULATOR 2700V	2

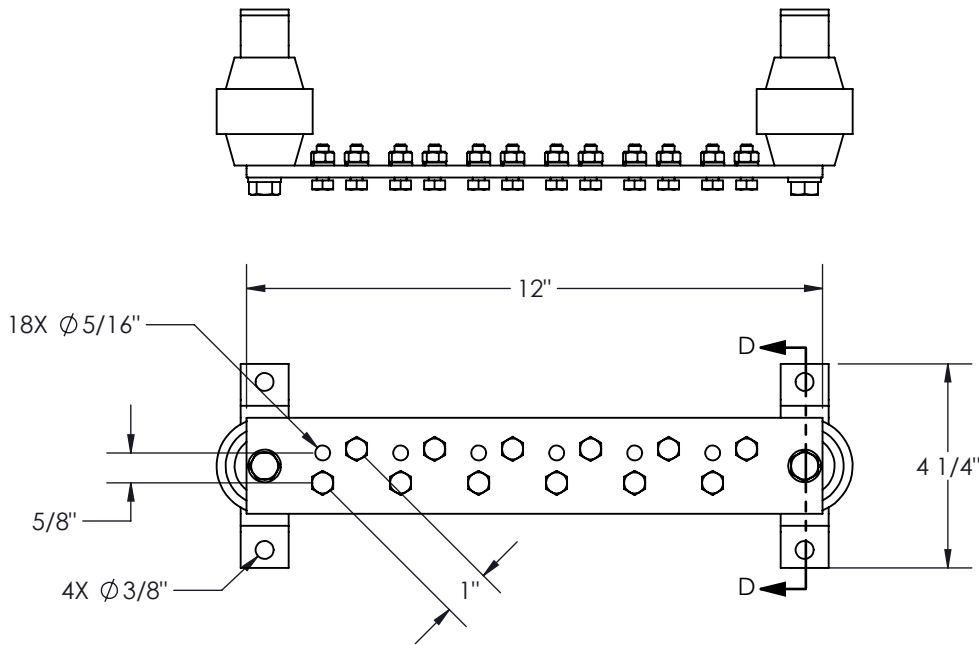

RÉV.	DESCRIPTION	DATE	APPR.
RÉVISIONS			

ELECTRON METAL
A.I.G. Inc.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF A.I.G. ELECTRON METAL INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF A.I.G. ELECTRON METAL INC IS PROHIBITED.

DRAWN BY: E.D.	Title: WALL MOUNT GROUND BUS 12 x 2
CHECKED BY: E.D.	
PROJECT: Accessories\Electrical\MALT\Mural	FILE: BarreMALT2x12_1305031412_Eng
PART NO.: ELEGWM-120204-TN	DRAWING NO.: 1305031412
REV.: -	SCALE: 1:4
DATE: 2012-08-21	SHEET: 1 / 1